

GENERAL REPAIR

Complete Your Shop With Coats®
Equipment

COATS

2 POST
4T 212NSR1 / 4T212SSR1

COMMERCIAL GRADE AUTOMOTIVE SERVICE LIFTS

2 POST PREMIUM "2N1" STYLE 12,000 LB. / 5.5T CAPACITY

3 Piece Front & Rear Arms
Optional Symmetric Model Available




#4T212NSR1
#4T212SSR1

EV COMPATIBLE
2 FIELD ADJUSTABLE HEIGHT SETTINGS



"Two in One" Arm Design

Easy access to approved lift points with 3 piece offset front and extended rear arms for asymmetric or symmetric loading

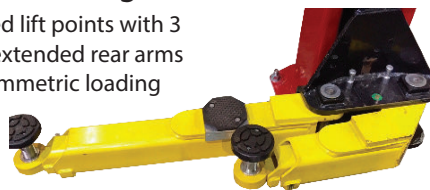

STANDARD ADAPTERS



Double Screw Universal pad with 4" 1/8" rubber pad contact area & nickel plated to prevent corrosion



STANDARD WITH LIFT



Set of 4
3" & 6" (76.2 & 152.4mm)
Nickel plated height Adapters #4T2PTA4-2



Set of 2
EV Sliding arm adapters #4T2PHA



Set of 2
GM Truck 7" (177.8mm) Pads #4TGMTA

OPTIONAL ACCESSORIES



Each
EV compatible round rubber covered adjustable double screw drop in style adapters #4T42100036



Set of 4
TESLA S&X adapters
#4T2PMD5-X



Set of 4
TESLA 3 adapters
#4T2PMD3

2N1 2 POST 12,000 LB. / 5.5T CAPACITY

To learn more about the 12K 2n1, or any of our other quality products, contact your authorized Coats distributor or call 1-855-876-3864 for the dealer nearest you.


CONTACT US NOW

www.coatsgarage.com
or call 1-855-876-3864

2N1 12,000 LB. / 5.5T CAPACITY
LEGENDARY RELIABILITY WITH STATE OF
THE ART CAPABILITY.

4T212NSR1
4T212SSR1

OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER AND COST LESS TO OPERATE

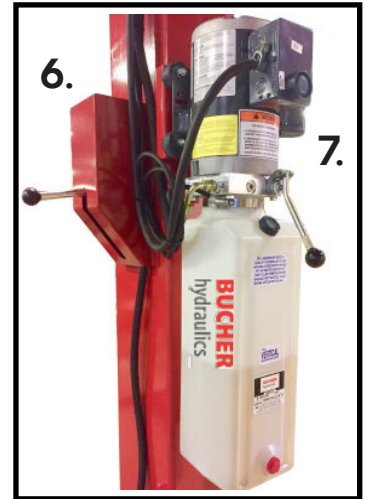

3/8" / 9.5mm pre-stressed cables with 4 3/8" / 111mm steel pulleys

Available in 2N1 or Symmetric with adjustable height & width

Reinforced carriage arm pin holes - plated gear style arm restraints



11" x 2" / 279 x 51mm Carriage mounted rubber door bumpers

FEATURES	
	Premium bake Powder coat finish
1.	4 3/8"/111mm Steel Pulleys & 3/8"/9.5mm 16 x 36 cables
2.	Columns 1 1/2" x 2 1/2" / 51 x 64mm inner tube support
3.	Reinforced carriage Arms pin holes
4.	Replaceable plated gear style arm restraints
5.	Carriage mounted rubber door bumper guards
6.	Single point release - controls can be on either column
7.	Premium US Made Bucher Power Unit
	70 1/2" / 1791mm stroke cylinders
	Field adjustable height setting
	Rubber power unit motor mounts
	3 piece retractable arms front & rear

BENEFITS	
	Protects against structural corrosion
1.	Last longer with less maintenance
2.	Up to 18% heavier columns flex less under load
3.	Carriage & lift arms last longer with less sag
4.	Last longer with lower maintenance cost
5.	Protects customer cars from door damage
6.	Greater flexibility for the operator
7.	Lasts longer with Less maintenance
	Lifts higher for more under car working height
	Lower installation cost more flexibility
	Motor lasts longer and runs quieter
	Provides greater access to approved lift points

Energy efficient US Made Bucher 2HP / 1.5kw power unit typically lasts the life of the lift - single point lock release - rubber motor mounts

EQUIPMENT FOOTPRINT

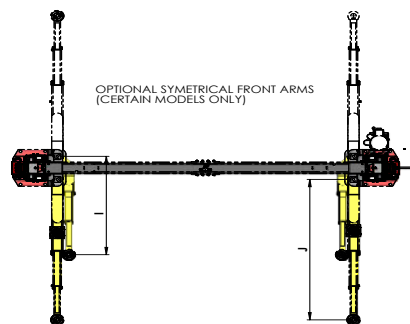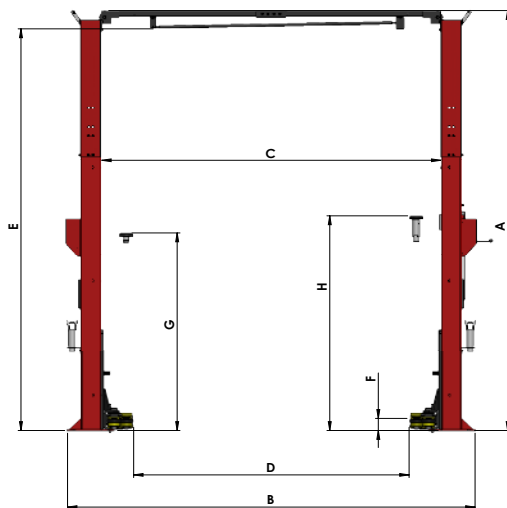

OPTIONAL SYMMETRICAL FRONT ARMS (CERTAIN MODELS ONLY)

ADDITIONAL FEATURES

	Capacity	12,000 lb. / 5.5T	12,000 lb. / 5.5T	12,000 lb. / 5.5T
	Lifting Style	2 N 1	Symmetric	Symmetric wide
A	Overall Height	158 7/8" / 4010 mm / or 154 7/8" / 3934mm	158 7/8" / 4010 mm / or 154 7/8" / 3934mm	154 7/8" / 3934mm
B	Overall Width	137 1/8" / 3483 mm	137 1/8" / 3483 mm	145 1/8" / 3686mm
C	Width Between Columns	109 3/4" / 2788 mm	109 3/4" / 2788 mm	117 3/4" / 2991mm
D	Drive Thru width	89 1/8" / 2264 mm	97 5/8" / 2480mm	105 5/8" / 2683 mm
E	Under Bar Clearance	153 1/2" / 3899mm or 149 1/2" / 3797 mm	153 1/2" / 3899mm or 149 1/2" / 3797 mm	149 1/2" / 3797 mm
F	Lowered Height - Standard Lift Pad	4.5" / 114 mm	4.5" / 114 mm	4.5" / 114 mm
G	Raised Height - Standard Lift Pad	76" / 1930 mm	76" / 1930 mm	76" / 1930 mm
H	Raise Height with Adapters	86 5/8" with 3" & 6" adapter / 2200 mm with 76 mm & 152 mm adapter	86 5/8" with 3" & 6" adapter / 2200 mm with 76 mm & 152 mm adapter	86 5/8" with 3" & 6" adapter / 2200 mm with 76 mm & 152 mm adapter
I	Front Arm Reach	21" to 39 3/4" / 533 to 1010 mm	33" to 62" / 838mm to 1575mm	35" to 59 5/8" / 889 mm to 1515 mm
J	Rear Arm Reach	33" to 62" / 838mm to 1575mm	33" to 62" / 838mm to 1575mm	35" to 59 5/8" / 889 mm to 1515 mm
	Lifting Time	75 seconds	75 seconds	75 seconds
	Standard Power Requirements	220V-60Hz-1ph-20amp / 2 HP/ 1.5kw	220V-60Hz-1ph-20amp 2HP/ 1.5kw	220V-60Hz-1ph-20amp 2HP/ 1.5kw
	Shipping Weight	2,300 lb. / 1,000 kg.	2,300 lb. / 1,000 kg.	2,300 lb. / 1,000 kg.
	ALI Certified	Yes	Yes	Yes
	COATS Part #	4T212NSR1	4T212SSR1	4T212SSR1



www.coatsgarage.com

1601 J.P. Hennessy Drive, LaVergne, TN 37086 (800) 688-6496 or (615) 641-7533
Hennessy Canada: 2430 Lucknow Drive, Unit 9, Mississauga, Ontario L5S 1V3 (905)

Part No. MKT00189 Spec REVISED 2
© 2021 Hennessy Industries, Inc.